



1.

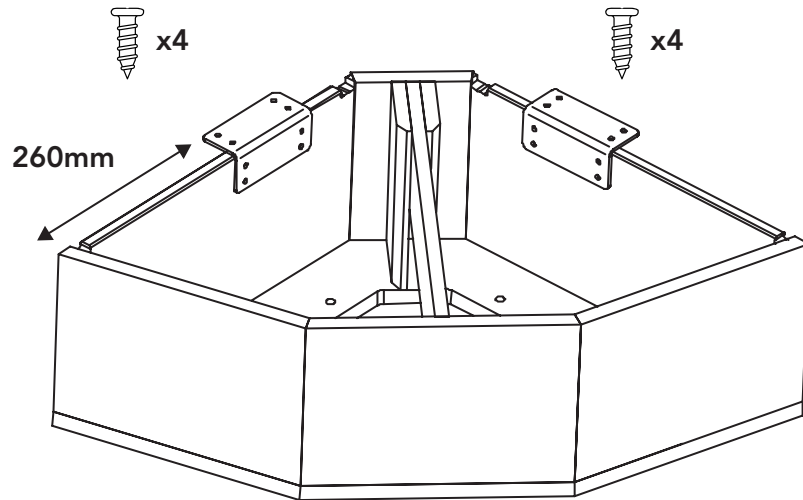


Always start with the plinth to the inner corner if this module is included. Screw the 90°-brackets on the sides, approx. 260mm from the back corner on each side.

2.



If adjustment feet are specified its time to mount them on all plinths. Turn all the plinths upside down and place the plinth-clamp in positions so you secure that the adjustmentfeet doesn't collide with it later on when you assemble the modules together. Adjustment feet comes in package by 4 or 6 pcs with screws. 2 screws/foot. Use a hammer to hit the foot on to the side. The sharp flaps goes into the wood.

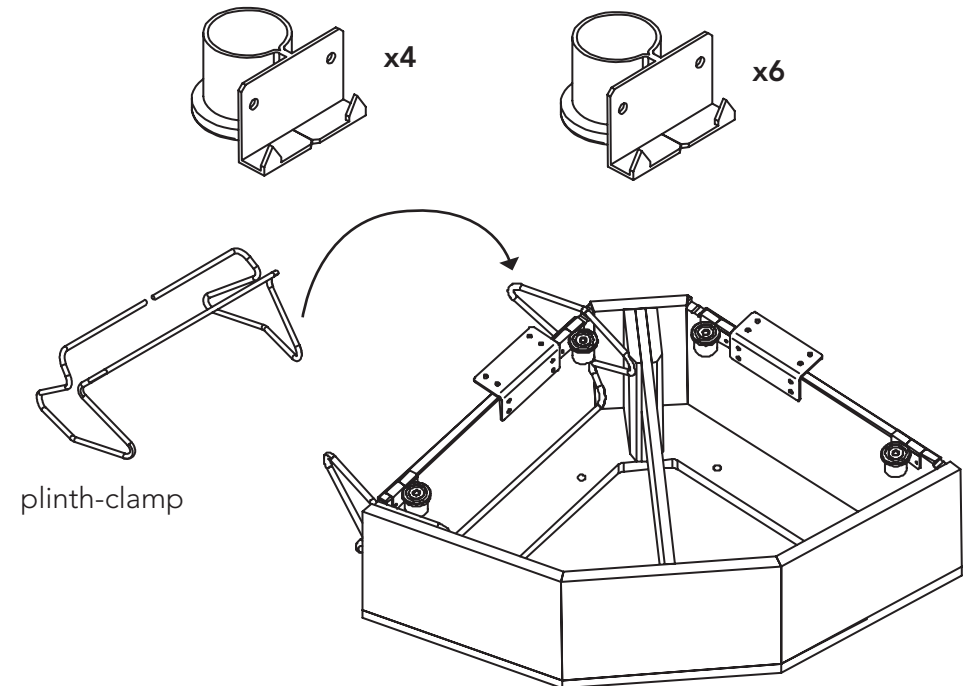


See all pos. for adjustment feet below.




**1-seater
x4**

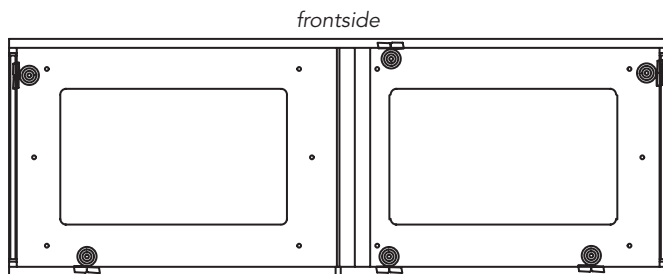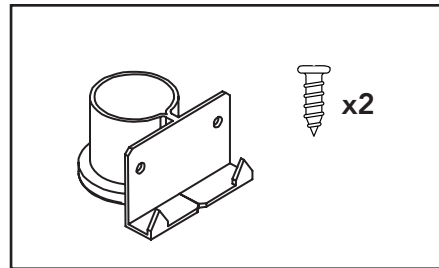


**2-seater
x6**

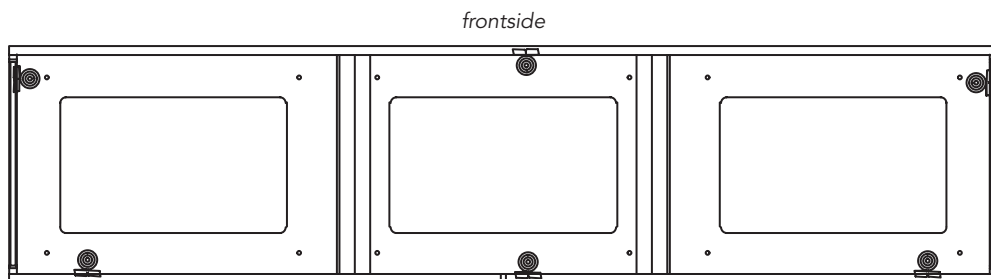

**3-seater
x6**

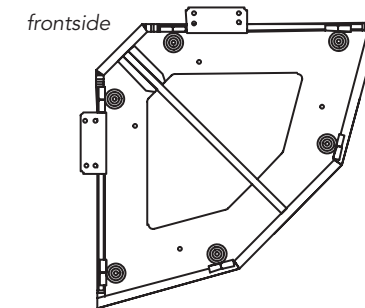

**Inner corner
x6**



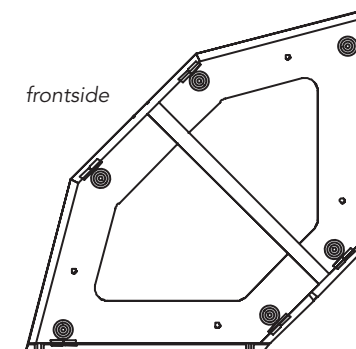


**Outer corner
x6**

3.

Next step is to assemble all the plinths with its seats. Each seat is attached with 4 screws and washers.

Turn the seats upside down. If the seat will be placed on a 2- or 3-seater plinth, you can use steering-dowels. Place the dowels from the bag of screws, into the center holes under the seat. They have corresponding holes in the plinths and can help the assembling. This is an option, not necessary. Then place the plinth onto the seat/seats and screw them together. Please screw each screw clockwise in two rounds.

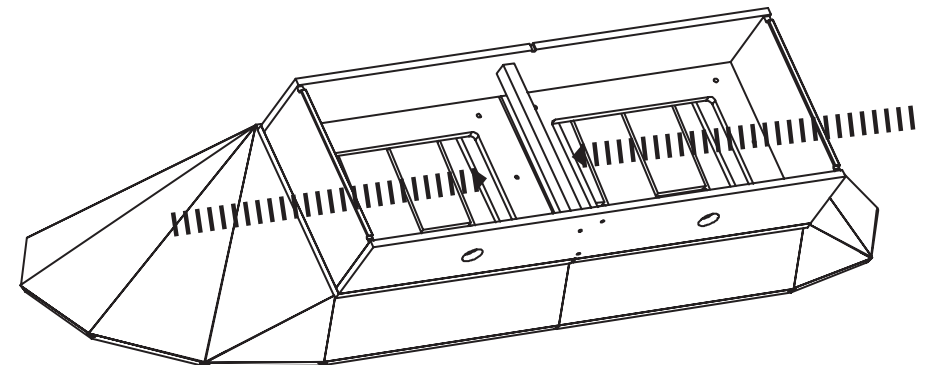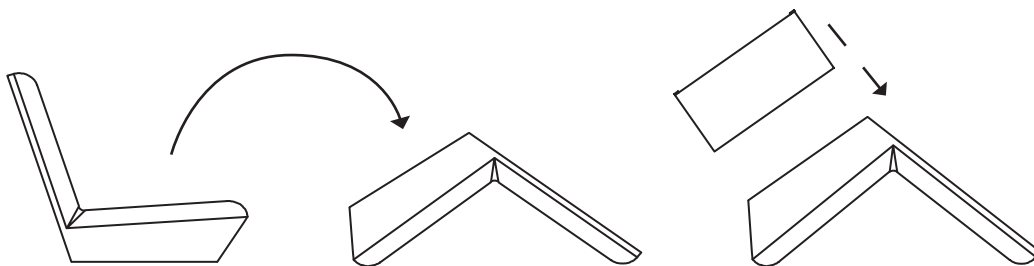
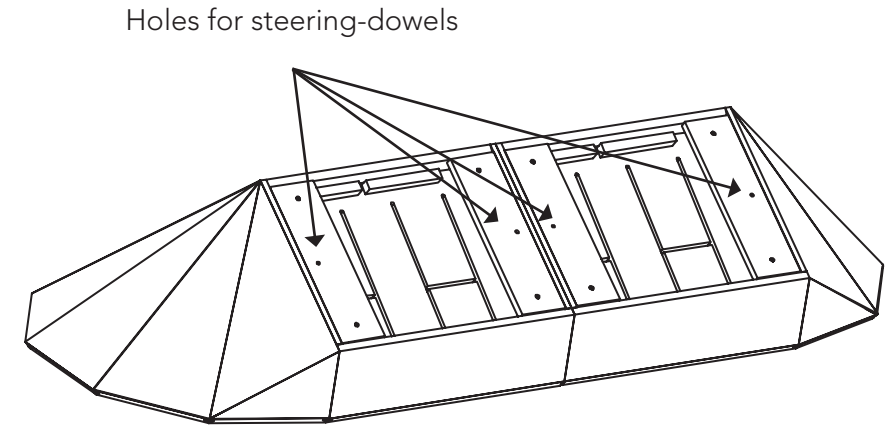


A very useful tool to use on set-ups on 2-seater and 3-seater plinths is the **quick-grip**. By using the tool you can push the modules tight. Very useful on thicker fabrics to find the corresponding attachment-holes.


4.

If the module is specified with power or table, its time to also equip the plinths with this.

The power-unit is placed in the large front holes. Locked by the connecting ring from behind

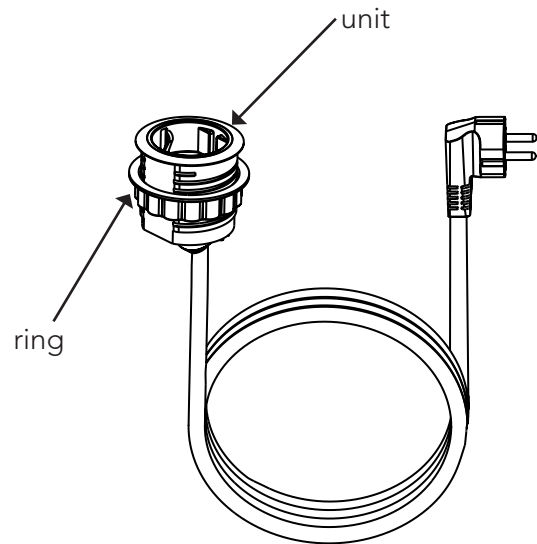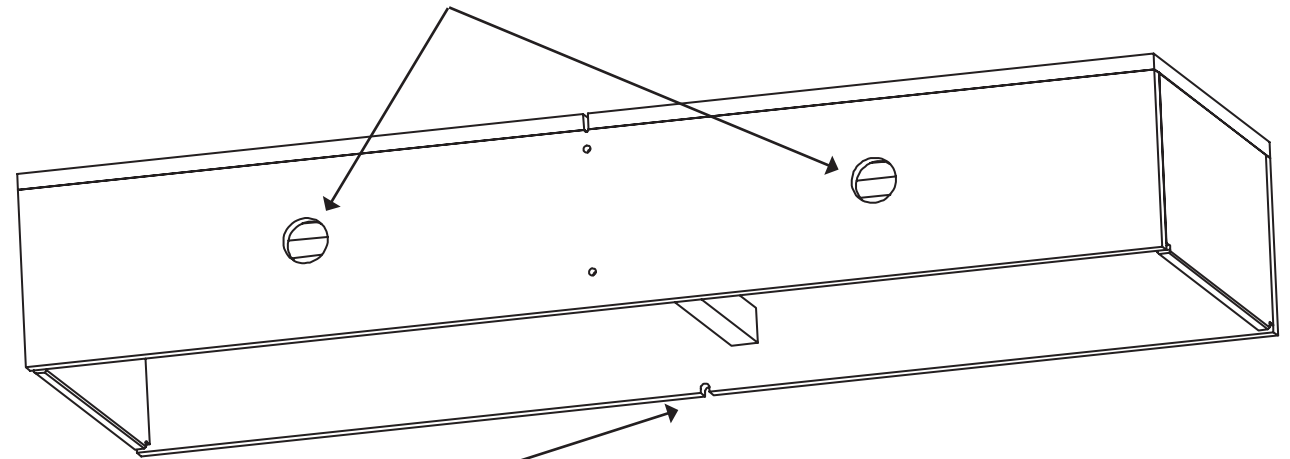

There is a small "hole" on the backside on all plinths with power, to lead out the contact.

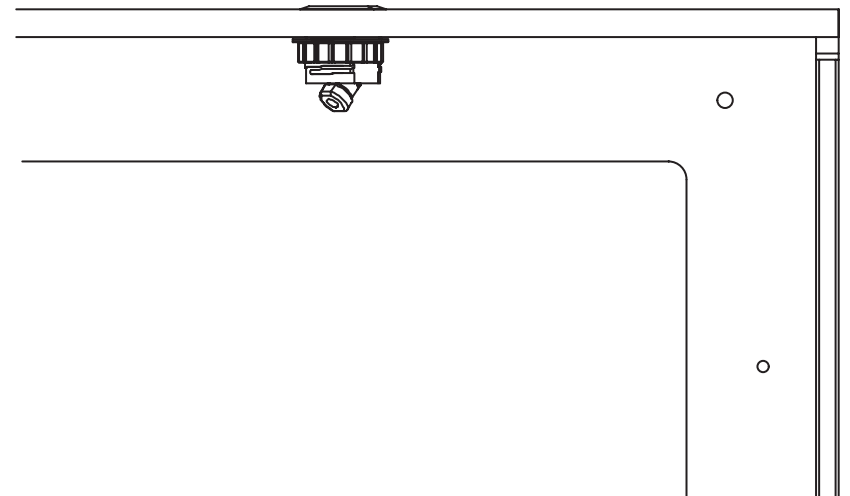

5.

The table is attached in the small holes on the frontside. Each table leg is attached with 2 screws and washers from inside the plinth.

Then turn up the sofa on its plinth and screw on the table top by using 6 screws.



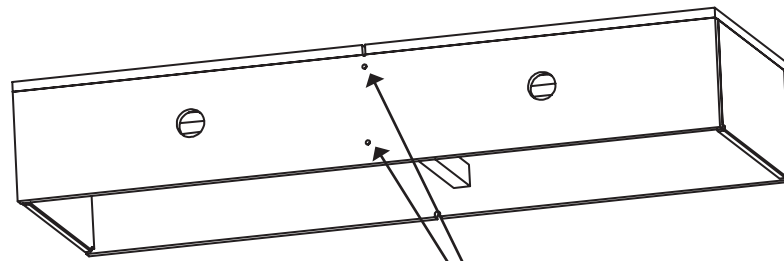


Table holes

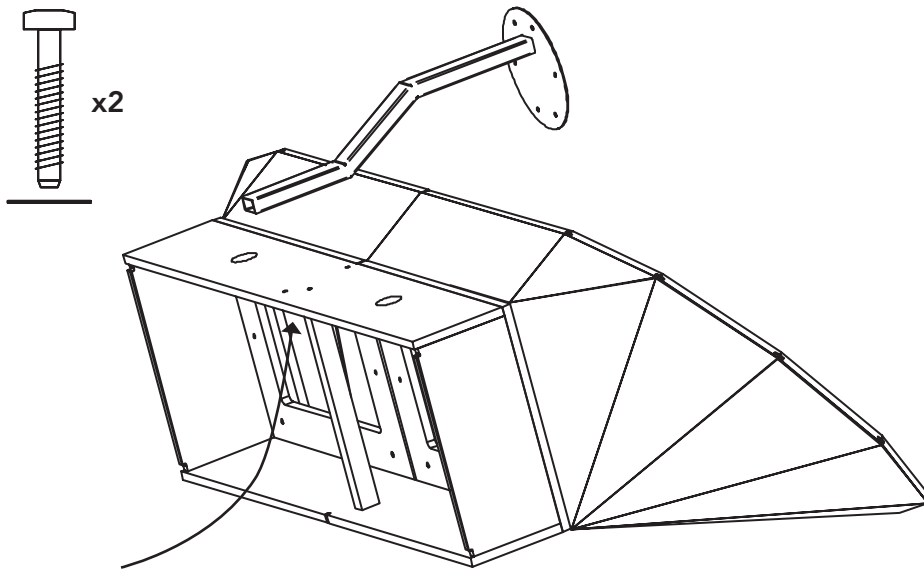

Screw from inside

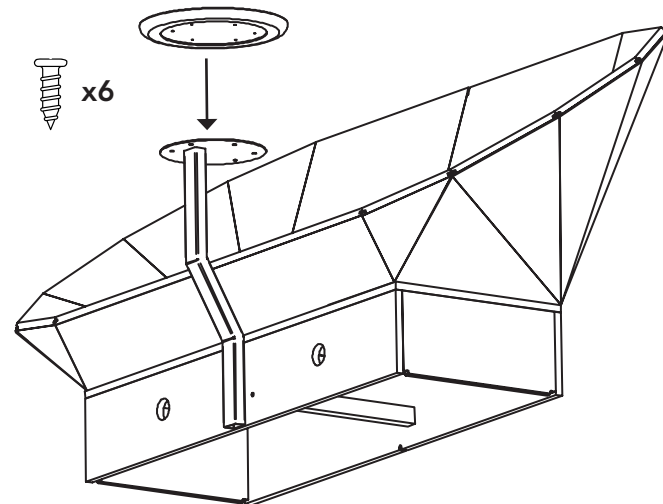


x6



6.

Now all the modules are prepared to be assembled. To assemble a chosen set-up we use the plinth-clamp. It's open on one side to have some flexibility. It's not important where this side is located. The clamp is symmetric otherwise.



Always start with the inner corner module and build from that one if the set-up contains one. Otherwise you can start anywhere. The clamp pushed the plinth-sides together when the sides are placed tight in the clamp. Place the clamps on the sides on the inner corner or other module. Take the connecting module and slide it in by force from above.

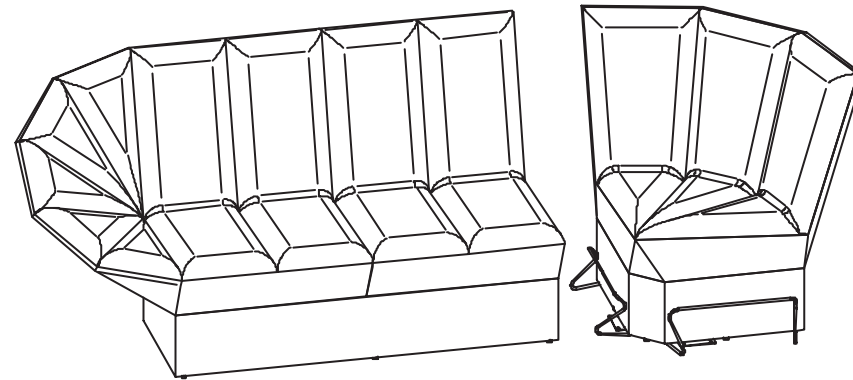

Slide in with weight

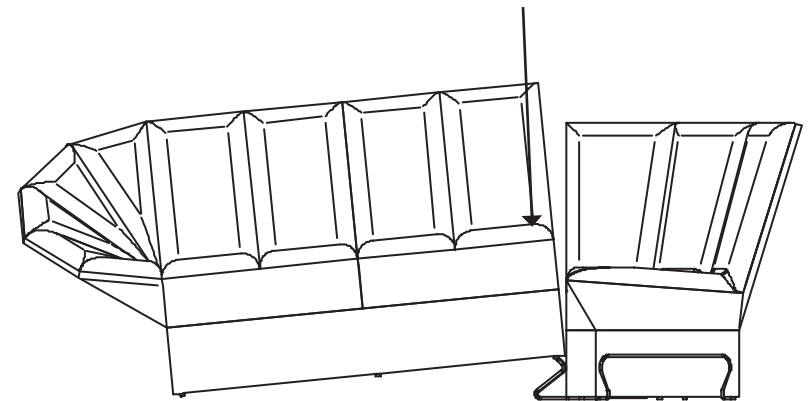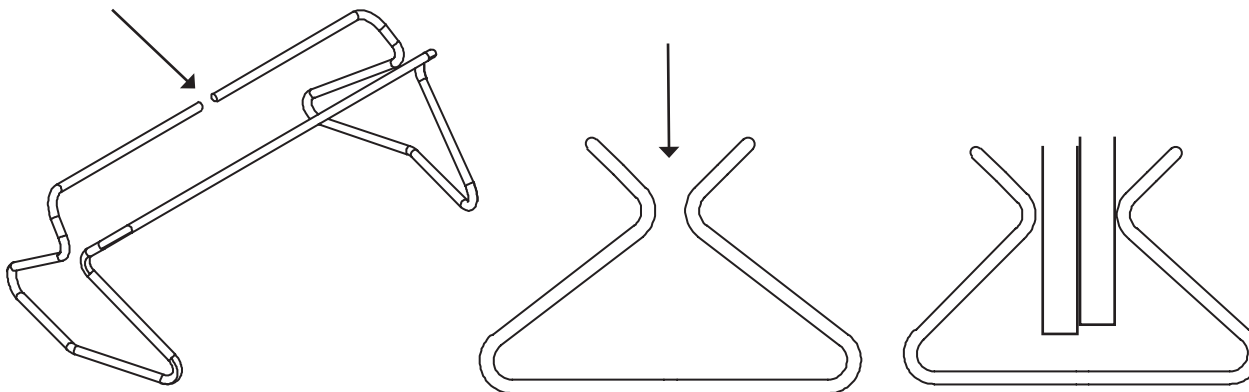

To rearrange the modules they need to be slid out from the clamp. Sit on one of the modules and push the other one forward or backward. If you have an inner corner, sit on that one and slide the other ones attached.

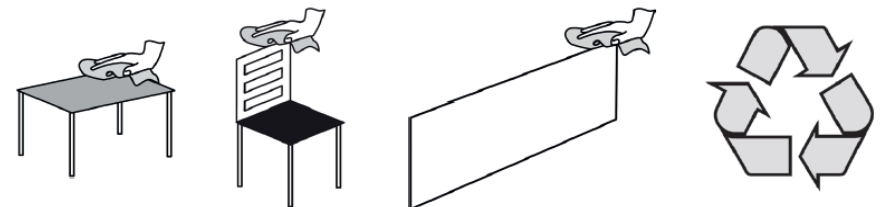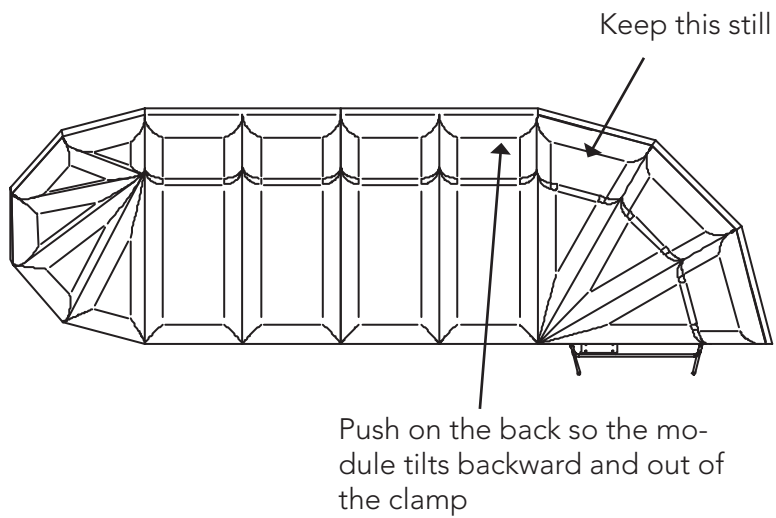

The product contains one or more of following materials:
Metal, plastic, wood, fabric, foam.