


Izi Pro S

2-LEGGED FRAME

Izi Pro S is an adjustable, motorized, sit-stand desk frame for flexible and sustainable workplace solutions. Izi Pro S is minimalist in design, with slim components, which means less material used and less weight. The frame is available in a version with two legs for rectangular tops, or with three legs, for combinations. The frame is adjustable in length (two-legged frame) as well as length and depth (three-legged frame), which enables a large selection of table top dimensions.

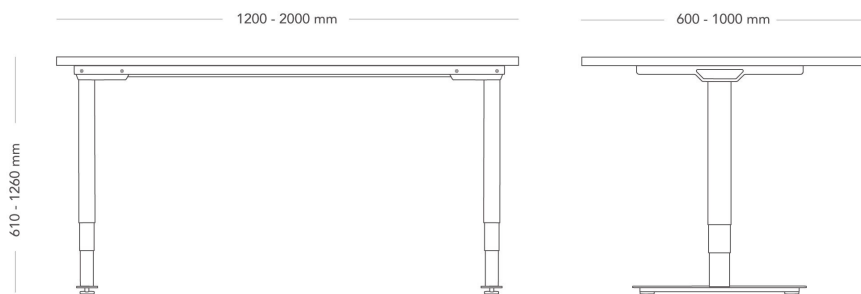

MODEL

Desk, sit/stand

ACCESSORIES

- Accessories for table screens
- Table screen
- Power and cable management

DETAILS

- Speed: 30 mm / s
- Two-legged frame has two 600 mm T-feet and two 575 mm brackets.
- Fits table tops 1200-2000 mm in length and 600-1000 mm in depth.

CONSTRUCTION

Powder-coated, motorized metal frame with rectangular legs and T-foot, with plastic adjustable feet. The wide part of the leg is turned upwards. The frame has steplessly adjustable steel-pipe rims. Anti-collision protection is included. Table top with beveled edge has a 22 mm MDF core. Table top with a straight edge has a 22 mm wood-fiber core. Surface coating of the table top is 0.2-2 mm depending on material choice. Maximum load of the frame is stated as distributed weight, including table top. Height is stated including table top (22 mm).

DIMENSIONS	Height: 610-1260 mm	Length: 1165-1705 mm
	Depth: 600 mm	Decibel(dB): 45 db
	Max load: 100 kg	Stroke: 650 mm

TESTED	EN 527-1-2, EN 1730
--------	---------------------


WARRANTY	5 years
----------	---------

Izi Pro S

3-LEGGED FRAME

Izi Pro S is an adjustable, motorized, sit-stand desk frame for flexible and sustainable workplace solutions. Izi Pro S is minimalist in design, with slim components, which means less material used and less weight. The frame is available in a version with two legs for rectangular tops, or with three legs, for combinations. The frame is adjustable in length (two-legged frame) as well as length and depth (three-legged frame), which enables a large selection of table top dimensions.

Three-legged frame for table combinations has two 600 mm T-feet, one support leg without foot and two 575 mm brackets. Fits table top combinations length 1600-2200 mm, width 1200-2200 mm, (alt. length 1200-2200 mm, width 1600-2200 mm)

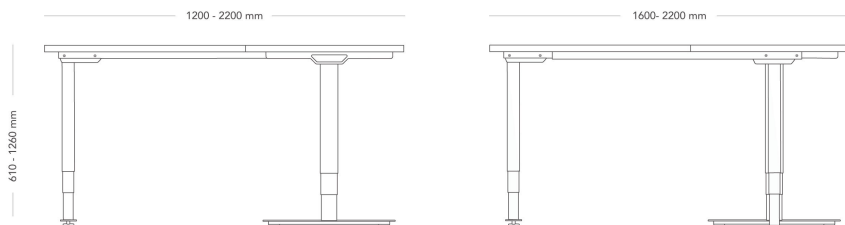

MODEL

Desk, sit/stand

ACCESSORIES

- Accessories for table screens
- Table screen
- Power and cable management

DETAILS

- Speed: 30 mm / s
- Three-legged frame for table combinations has two 600 mm T-feet, one support leg without foot and two 575 mm brackets.
- Fits table top combinations length 1600-2200 mm, width 1200-2200 mm, (alt. length 1200-2200 mm, width 1600-2200 mm)

CONSTRUCTION

Powder-coated, motorized metal frame with rectangular legs and T-foot, with plastic adjustable feet. The wide part of the leg is turned upwards. The frame has steplessly adjustable steel-pipe rims. Anti-collision protection is included. Table top with beveled edge has a 22 mm MDF core. Table top with a straight edge has a 22 mm wood-fiber core. Surface coating of the table top is 0.2-2 mm depending on material choice. Maximum load of the frame is stated as distributed weight, including table top. Height is stated including table top (22 mm).

DIMENSIONS

Height: 610-1260 mm Decibel(dB): 50 db
 Max load: 150 kg Stroke: 650

TESTED

EN 527-1-2, EN 1730

WARRANTY

5 years
