


Savo XO

OFFICE CHAIR

XO is an elegant, exclusive and expressive chair with ergonomic features. XO has a high and wide back and is available with or without a headrest. The chair is available with back and seat upholstered in fabric or leather and is suitable both as a work chair and as a chair in the meeting room.

70 back, not compatible with headrest

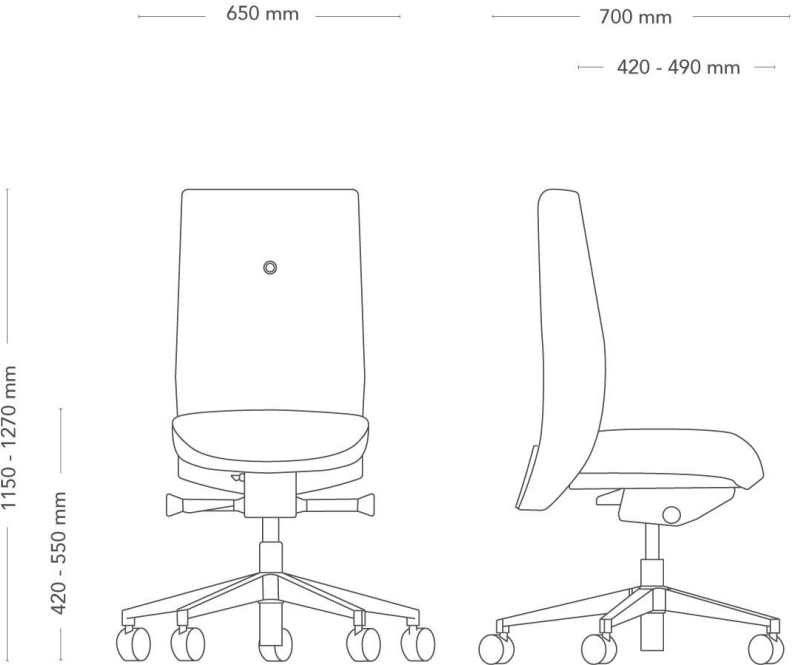


MODEL	Savo XO workchair	
VARIANTS	– 70 back – 80 back	
ACCESSORIES	– Adjustable armrests – Castors – Upholstered armrests	
CONSTRUCTION	Upholstered back with plywood frame, cold foam padding. J-bar of 8 mm flat steel. Seat frame made of plywood with cold foam padding. Mechanism cast in recycled aluminium. Height-adjustable steel gas column. 5-star swivel base made of cast recycled aluminum with castors, Ø60 mm. Armrest made of injection-molded plastic with J-bar in cast recycled aluminium.	
DIMENSIONS	Height: 1150-1270 mm Depth: 700 mm Sit depth: 420-490 mm	Width: 650 mm Seat height (with load): 420-550 mm
WEIGHT	17 kg	
TESTED	EN 1335 1-2	
WARRANTY	10 years	

Savo XO

OFFIE CHAIR WITH HEADREST

XO is an elegant, exclusive and expressive chair with ergonomic features. XO has a high and wide back and is available with or without a headrest. The chair is available with back and seat upholstered in fabric or leather and is suitable both as a work chair and as a chair in the meeting room.

Back height 80.

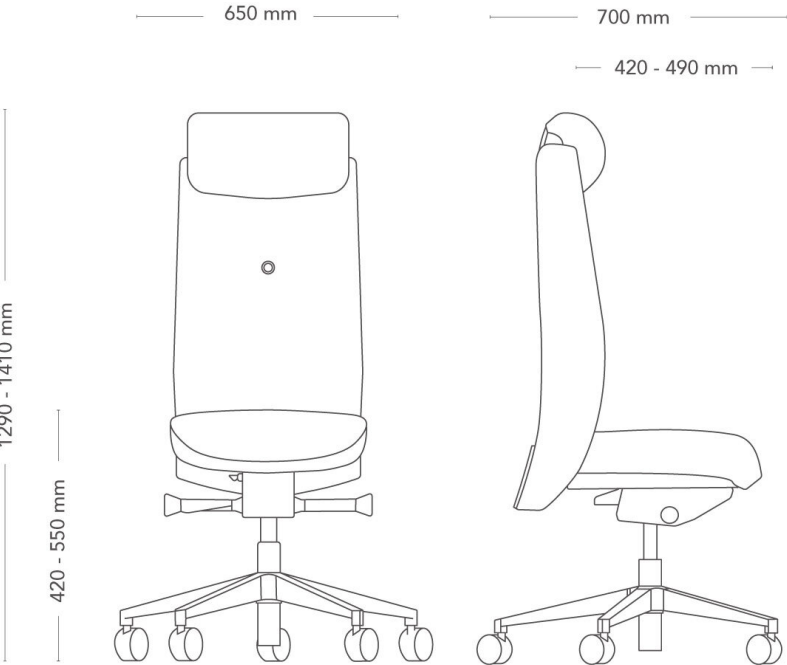

MODEL	Savo XO workchair	
VARIANTS	– 70 back – 80 back	
ACCESSORIES	– Adjustable armrests – Castors – Upholstered armrests	
CONSTRUCTION	Upholstered back with plywood frame, cold foam padding. J-bar of 8 mm flat steel. Seat frame made of plywood with cold foam padding. Mechanism cast in recycled aluminium. Height-adjustable steel gas column. 5-star swivel base made of cast recycled aluminum with castors, Ø60 mm. Armrest made of injection-molded plastic with J-bar in cast recycled aluminium.	
DIMENSIONS	Height: 1290-1410 mm Depth: 700 mm Sit depth: 420-490 mm	Width: 650 mm Seat height (with load): 420-550 mm Base diameter: 660 mm
WEIGHT	20 kg	
TESTED	EN 1335 1-2	
WARRANTY	10 years	